

Kawasaki ZZR1400 ABS 2006-2011 (ARA-1 + ARA-K4A)

Secure the bike on a stand.

Remove the seats and the side fairings.

Locate the ignition coil connectors.



Plug the ARA connectors in-line with the ignition coil connectors.




Connect the ARA Black wire terminal to the chassis ground.




Kawasaki ZZR1400 ABS 2006-2011 (ARA-1 + ARA-K4A)

Locate the Black ABS module connector.

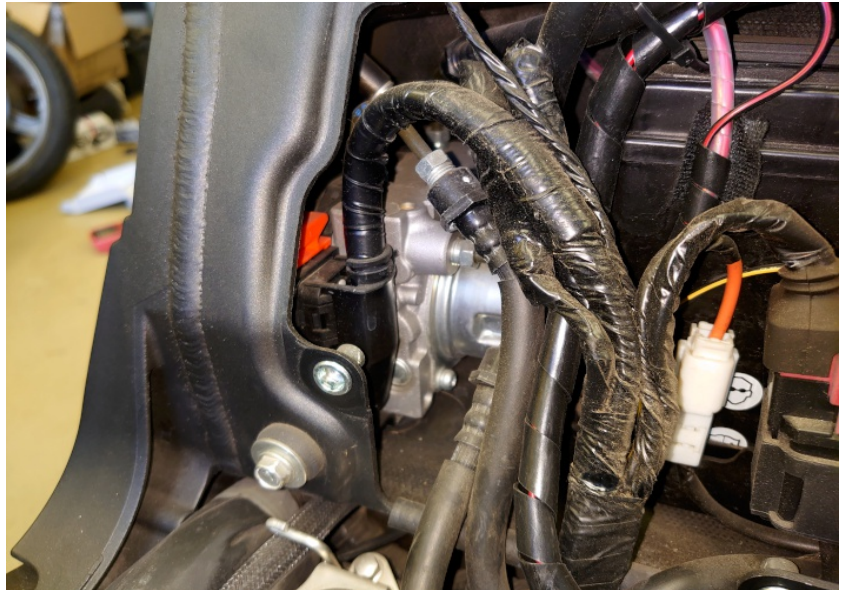

Splice the ARA Blue wire to the Green wire of the ABS connector.


Splice the ARA Green wire to the White/Red wire of the ABS connector.

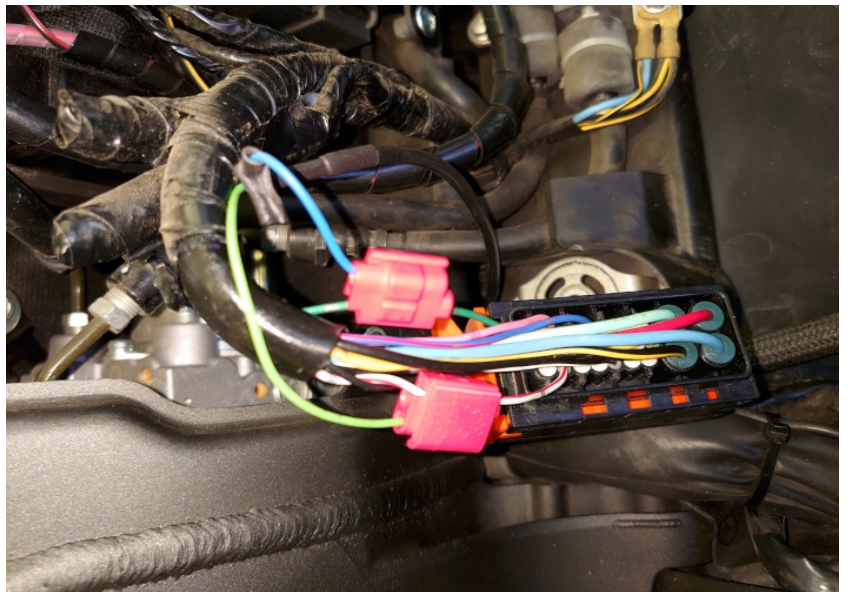

Optional:

Connect the ARA Pink wire to the Black/Yellow wire of the Clutch switch.

While the connector is connected, turn ignition on. Measure the voltage (DC 20V setting) on the wires, at the back side of the plug. You need to use the wire where the voltage value changes while you pull the clutch lever. Alternatively check the clutch switch indication in the ARA application on your phone.

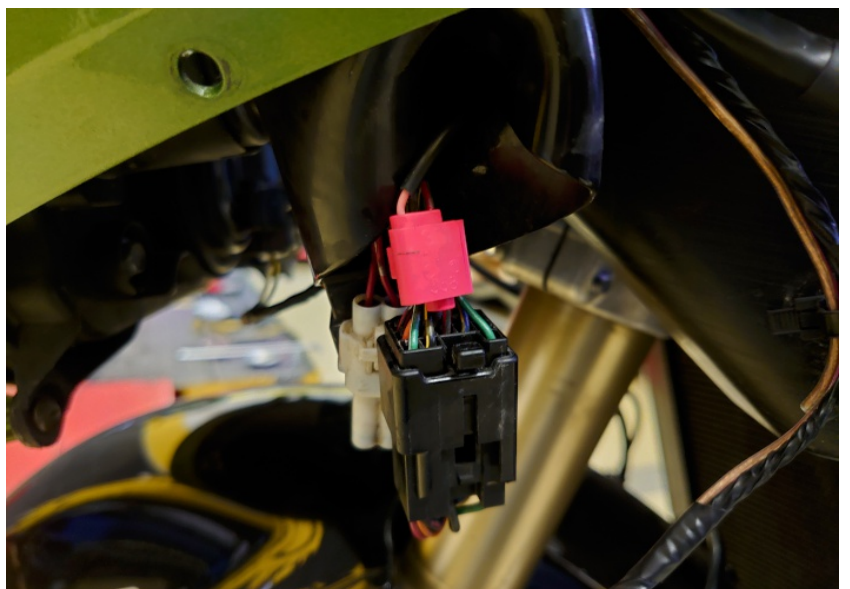

Kawasaki ZZR1400 ABS 2006-2011 (ARA-1 + ARA-K4A)

Mount the switch onto the handlebar.



Mount the LED indicator.



Typical position for the ARA module.

Secure the unit properly.

