

Switchable Exhaust Servo Eliminator Supplementary Manual



Ducati Panigale V4 ABS TC 2024- (ESE-SW-D07)

Secure the bike on a stand.




Remove the side fairing on the right side.



Locate and unplug the exhaust servo motor connectors.

Plug the ESE-SW connectors in-line with the exhaust servo motor connectors.

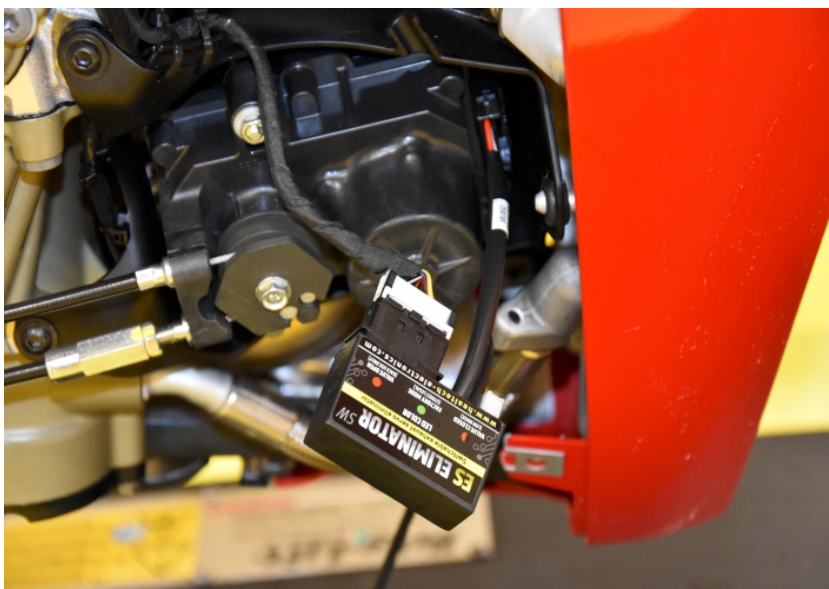


Switchable Exhaust Servo Eliminator Supplementary Manual



Ducati Panigale V4 ABS TC 2024- (ESE-SW-D07)

Locate the Oxygen sensor connector on the right side.

Connect the ESE-SW Red wire to the Brown/White wire of the Oxygen sensor connector.

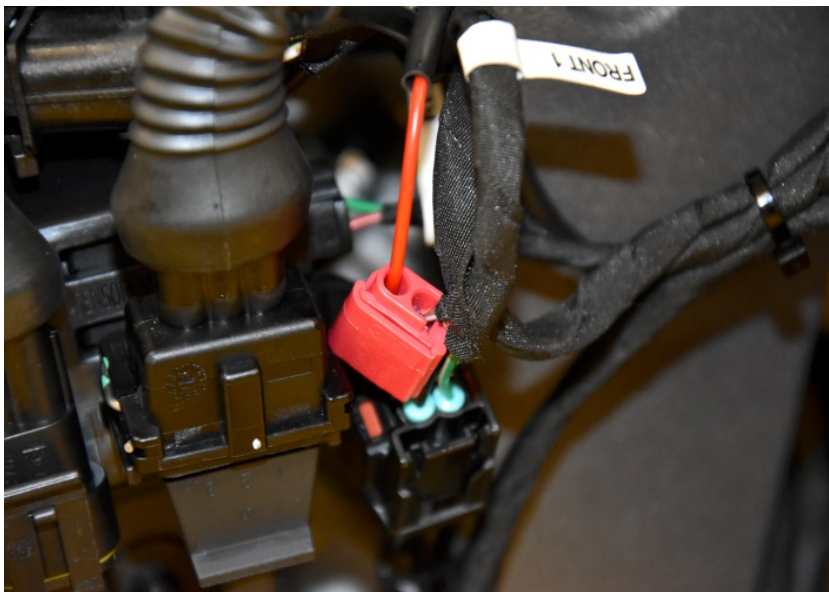

Mount the switch onto the handlebar.



Typical position of the Switchable Exhaust Servo Eliminator module.

Secure the unit properly.

