



## SUPPLEMENTARY MANUAL

for GPX-H01


REMOVE THE SEAT.  
REMOVE FRAME COVERS  
UNDER FUEL TANK AT BOTH SIDE.  
LIFT UP OR REMOVE THE  
FUEL TANK.  
ROUTE THE GPX CABLE THROUGH  
THE TOP OPENING OF THE  
DUST BOOT.



PLUG GPX CONNECTORS IN-LINE  
WITH THE SPEED SENSOR  
CONNECTORS.  
(TRANSPARENT, 3-POLE CONNECTORS  
IN DUST BOOT AT THE LEFT SIDE)



CONNECT GPX BLACK/GREEN WIRE  
TO  
YELLOW/GREEN WIRE OF  
ECU/ECM CONNECTOR.  
(BLACK CONNECTOR UNDER SEAT)

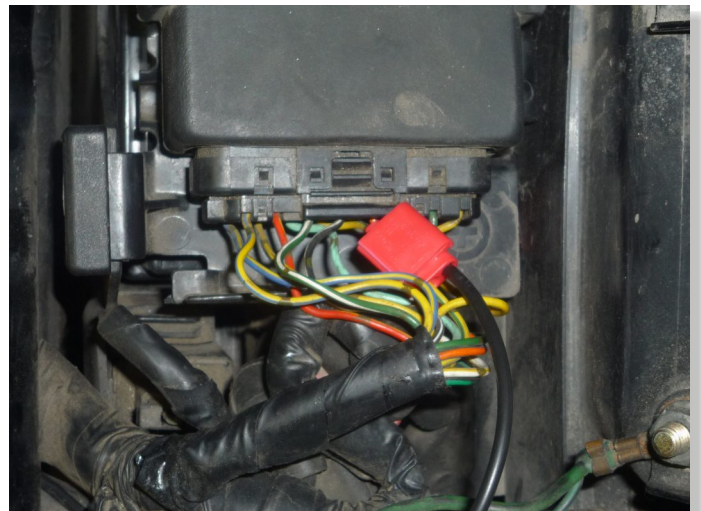

# Honda CB1300 X-4

1997-2003



TYPICAL POSITION FOR THE  
GEAR INDICATOR.

