



# SUPPLEMENTARY MANUAL

for GPX-U01


REMOVE THE MAIN SEAT.  
REMOVE THE FRAME COVER  
UNDER SEAT ON RIGHT SIDE.  
LIFT UP OR REMOVE THE  
FUEL TANK.



LOCATE THE SPEED SENSOR  
CONNECTOR ON RIGHT SIDE  
UNDER FRAME COVER.



CONNECT GPX RED WIRE TO  
GREEN WIRE OF SPEED SENSOR  
CONNECTOR.  
(TRANSPARENT, 3-POLE CONNECTOR)

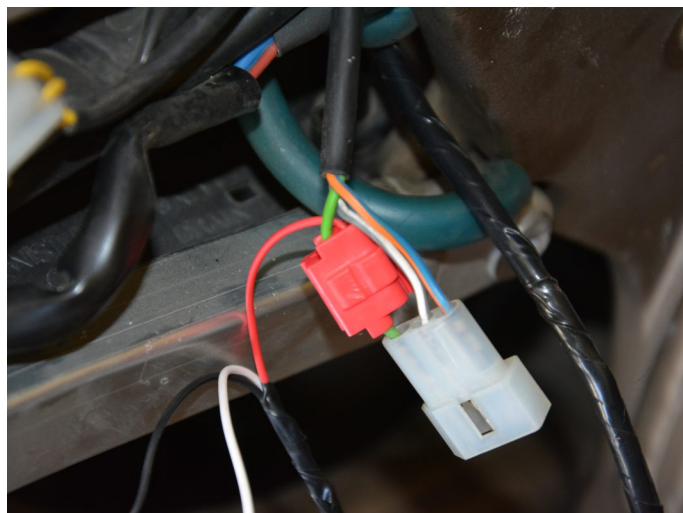


# Aprilia Tuono


2002-2005




**CONNECT GPX WHITE WIRE TO  
GRAY/WHITE WIRE OF SPEED SENSOR  
CONNECTOR.**  
(TRANSPARENT, 3-POLE CONNECTOR)

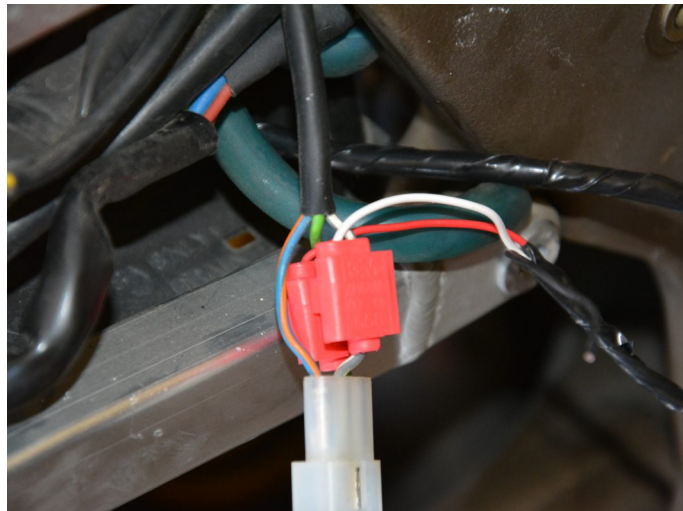

**CONNECT GPX BLACK WIRE TO  
BLUE/ORANGE WIRE OF SPEED  
SENSOR CONNECTOR.**  
(TRANSPARENT, 3-POLE CONNECTOR)

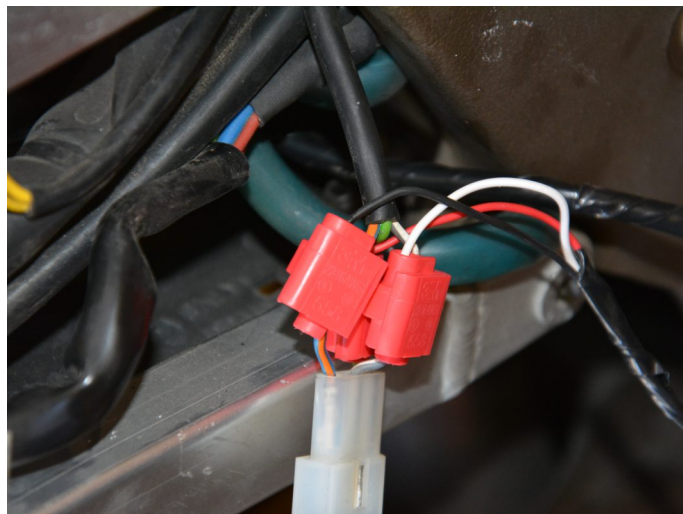

**CONNECT GPX GREEN WIRE TO  
ORANGE/WHITE WIRE OF  
IGNITION COIL UNDER MIDDLE  
FAIRING ON RIGHT SIDE.**

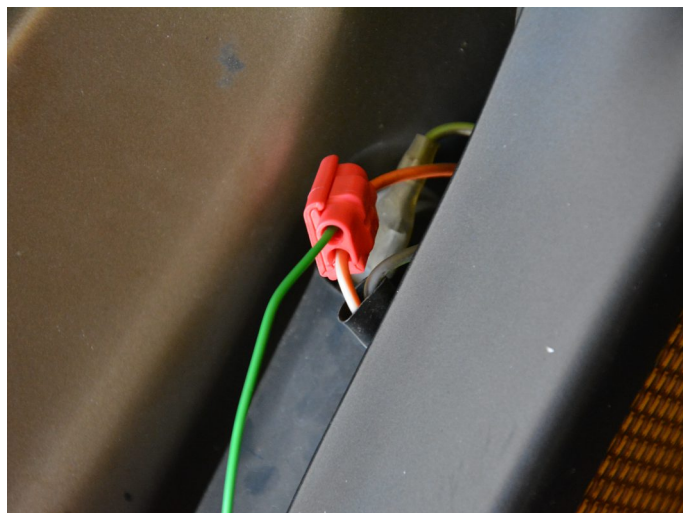

# Aprilia Tuono 2002-2005



TYPICAL POSITION FOR THE  
GEAR INDICATOR.

