



# SUPPLEMENTARY MANUAL

for GPXT+ GPX-Y01

REMOVE THE MAIN SEAT AND THE  
TANK COVER.

LIFT UP OR REMOVE THE  
FUEL TANK.



PLUG THE GPX CONNECTORS IN-  
LINE WITH THE SPEED SENSOR  
CONNECTORS.

(WHITE, 3-POLE TRIANGULAR CONNECTORS  
AT THE LEFT SIDE, BELOW FUEL TANK.)



CONNECT THE GPX BLACK/GREEN  
WIRE TO THE GRAY WIRE OF  
THE CRANKSHAFT POSITION SENSOR  
CONNECTOR.

(TRANSPARENT, 2-POLE CONNECTOR  
BELOW THE FUEL TANK.)






# SUPPLEMENTARY MANUAL

for GPXT+ GPX-Y01

CONNECT THE GPX RED WIRE TO  
THE BROWN WIRE OF THE REAR  
BRAKELIGHT SWITCH CONNECTOR.

(BLACK, 2-POLE CONNECTOR  
AT THE RIGHT SIDE, BELOW THE FUEL TANK.)

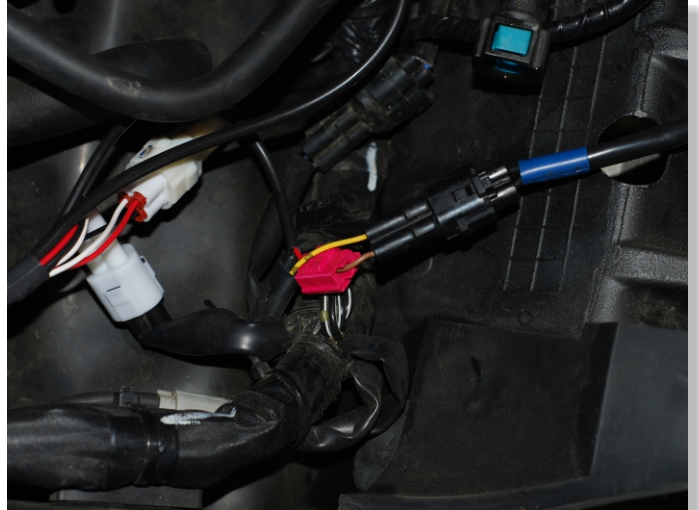

TYPICAL POSITION FOR THE  
GEAR INDICATOR.

