


Aprilia RSV4 Factory 2009-2015




SUPPLEMENTARY MANUAL

for QSE-1 + QSH-P4F

REMOVE THE SEATS.

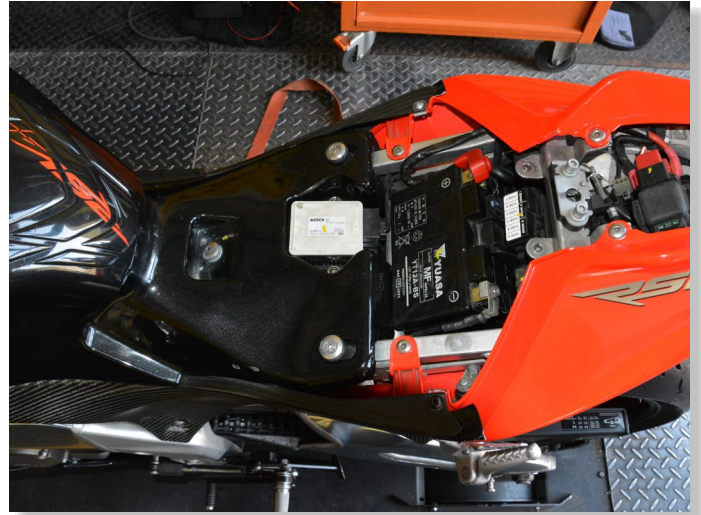

REMOVE THE
FRAME COVERS BELOW FUEL TANK.

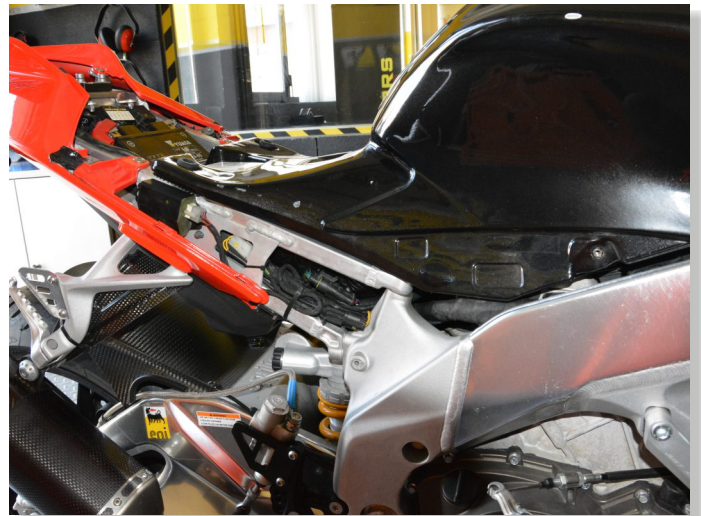

LIFT UP OR REMOVE THE
FUEL TANK.



Aprilia RSV4 Factory 2009-2015



CONNECT QSH CONNECTORS IN-LINE WITH THE IGNITION COIL CONNECTORS ON LEFT SIDE.
(FRONT CYLINDER, BLACK, 3-POLE CONNECTORS)




CONNECT QSH CONNECTORS IN-LINE WITH THE IGNITION COIL CONNECTORS ON RIGHT SIDE.
(FRONT CYLINDER, BLACK, 3-POLE CONNECTORS)



CONNECT QSH CONNECTORS IN-LINE WITH THE IGNITION COIL CONNECTORS ON AIRBOX.
(REAR CYLINDER, BLACK, 3-POLE CONNECTORS.)

DISCONNECT ONE BIKE CONNECTOR AT A TIME AND CONNECT ONE PAIR OF THE QSH PLUGS.
DO NOT MIX THE CONNECTOR PAIRS!!

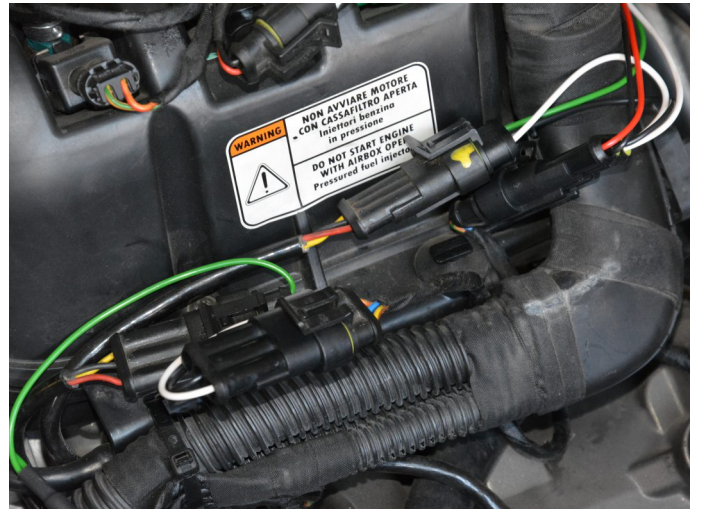

Aprilia RSV4 Factory

2009-2015



MOUNT THE QSE SENSOR.

(USE THE NEW BOLT AND WASHERS SUPPLIED WITH THE UNIT. MAKE SURE TO PLACE ONE WASHER ABOVE THE SENSOR AND ONE WASHER BELOW THE SENSOR.

USE THE SUPPLIED SPACER OR SIMILAR BELOW THE WASHER.

SPACER SIZE: 10MM*6MM*4MM

TIGHTEN THE SCREW BY 3-5 NM.
WHEN TIGHTENED, DO NOT TRY TO ROTATE THE SENSOR BODY.)



TYPICAL POSITION FOR THE QUICKSHIFTER EASY.

