




SUPPLEMENTARY MANUAL

[QSX-P4B]

REMOVE THE MAIN SEAT.



REMOVE THE CHROME FUEL TANK
UPPER COVER.
REMOVE THE LEFT AND RIGHT
INDICATOR COVERS FROM
FUEL TANK.

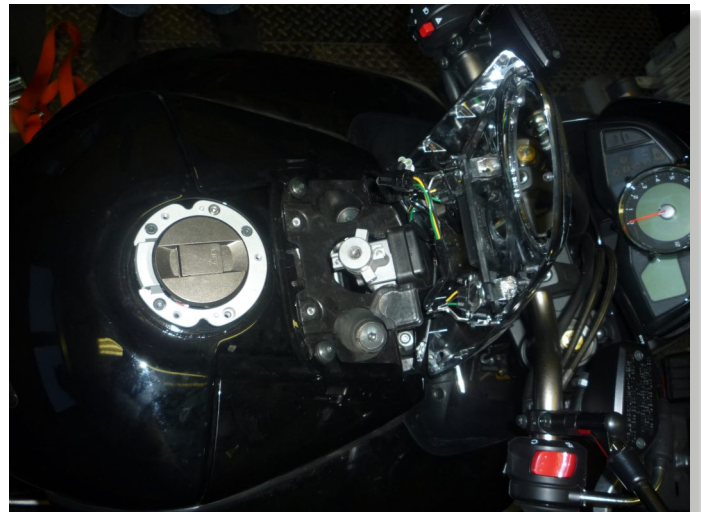

REMOVE THE LEFT AND RIGHT
BLACK FRAME COVERS
FROM FUEL TANK.
LIFT UP OR REMOVE THE
FUEL TANK.






SUPPLEMENTARY MANUAL

REMOVE THE FUEL TANK.




REMOVE THE AIRBOX.

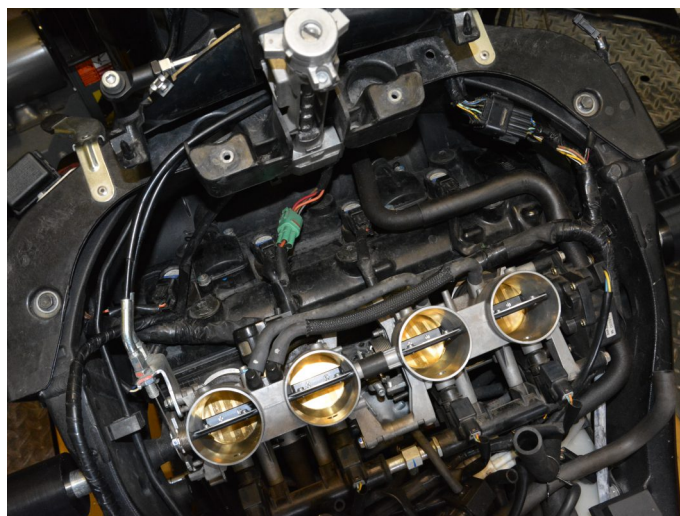

PLUG QSX CONNECTORS IN-LINE
WITH THE IGNITION COIL
CONNECTORS.

(BLACK, 2-POLE CONNECTORS BELOW AIRBOX)

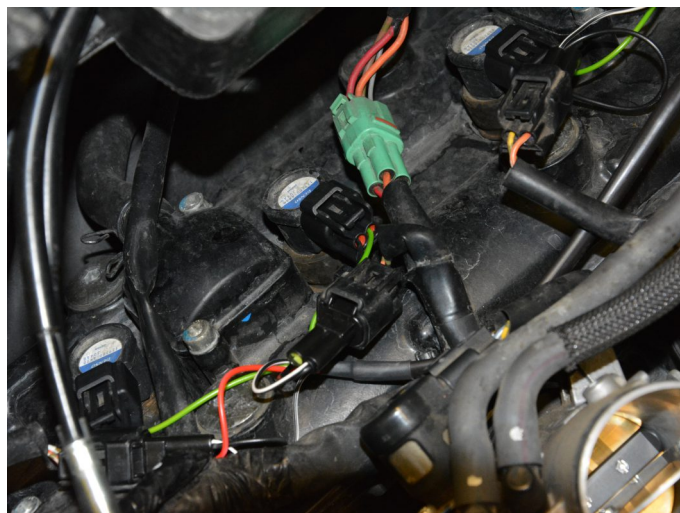


Suzuki B-King


2008-2012



**CONNECT QSX BLACK WIRE
TERMINAL TO CHASSIS GROUND.**

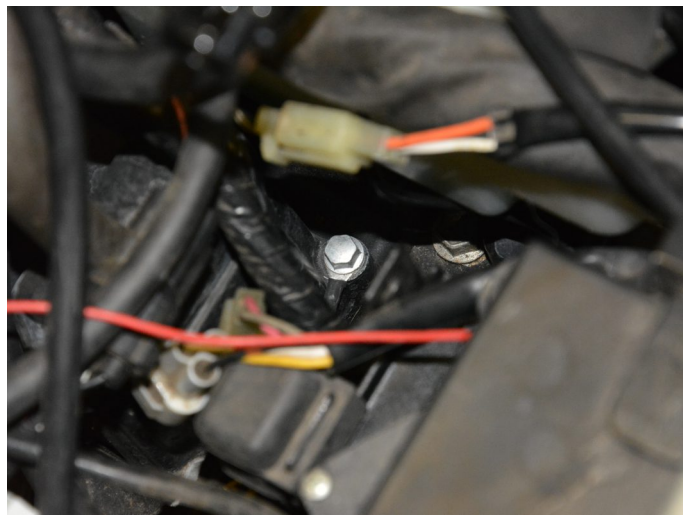

MOUNT THE QSE SENSOR.
(REPLACE THE BOLT WITH THE ONE SUPPLIED.
PLACE THE CONICAL WASHERS AT THE TWO SIDES OF
THE SENSOR LIKE THIS: (O).
TIGHTEN THE BOLT IN
THIS POSITION BY ABOUT 5-6 NM.
IF YOU DO NOT HAVE
A TORQUE WRENCH, TIGHTEN THE BOLT UNTIL THE
SHIFT ARM IS TIGHT ON THE GEARBOX SHAFT.)

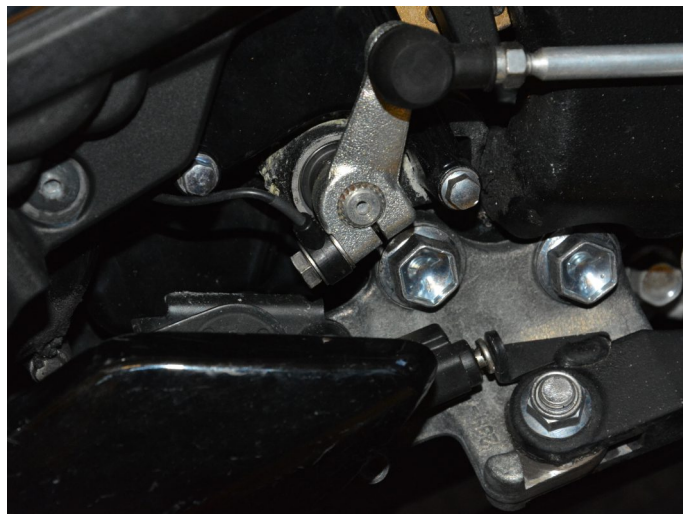

**TYPICAL POSITION FOR THE
QUICKSHIFTER EASY.**

