



SUPPLEMENTARY MANUAL

for QSE-1 + QSX-P4B


REMOVE THE MAIN SEAT.



REMOVE THE BLACK
FUEL TANK COVERS.



REMOVE THE FUEL TANK.

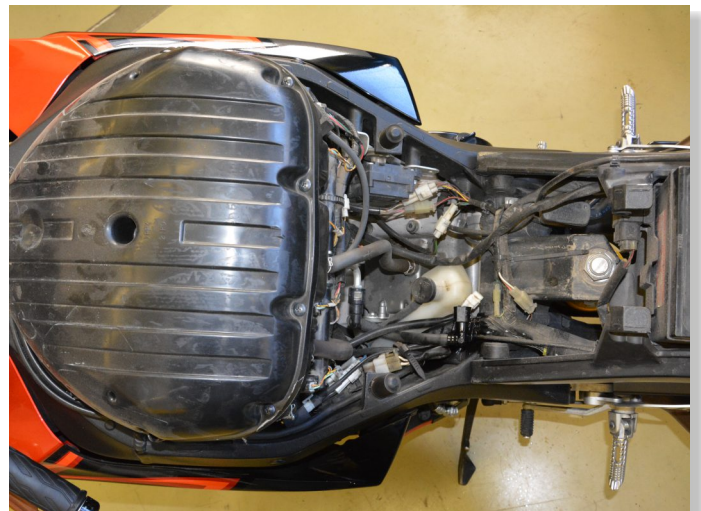

Suzuki GSX-R1000

2007-2008



REMOVE THE AIRBOX.



**PLUG QSX CONNECTORS IN-LINE
WITH THE IGNITION COIL
CONNECTORS.**
(BLACK, 2-POLE CONNECTORS BELOW AIRBOX)



**MOUNT THE QSX MODULE TO THE
INNER SIDE OF THE FRAME BY THE
SUPPLIED VELCRO STRIPS,
AND SECURE THE CABLES WITH
CABLE TIES.**
(AVOID DIRECT CONTACT WITH HEAT SOURCES,
LIKE THE CYLINDER HEAD.)



Suzuki GSX-R1000

2007-2008



**CONNECT QSX BLACK WIRE
TERMINAL TO CHASSIS GROUND.**



MOUNT THE QSE SENSOR.
(USE THE NEW BOLT SUPPLIED WITH THE UNIT.
TIGHTEN THE SCREW BY 5-6 NM.

WHEN TIGHTENED, DO NOT TRY TO ROTATE THE
SENSOR.

DO NOT ROUTE THE SENSOR CABLE ALONG WITH
OTHER CABLES, ESPECIALLY THE QSX HARNESS, THE
IGNITION COIL, INJECTOR, GENERATOR AND ECU
WIRES.)



**TYPICAL POSITION FOR THE
QUICKSHIFTER EASY.**

